

Original operating manual

Reflective light barriers series ISD/ISN/RLR-2XC-IDX(-OP)

ISD-2XC-IDX-OP

Housing M30

ISN-2XC-IDX-OP



1258


IECEx designation
Ex d [op is Ga] IIC T6 Gb
Ex tb [op is Da] IIIB T100°C Db IP67




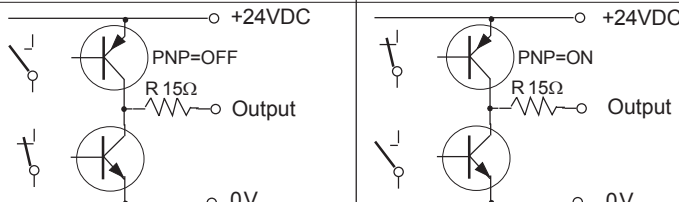

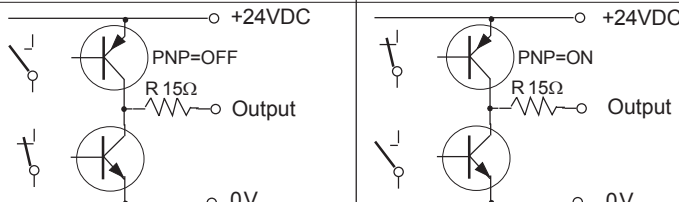

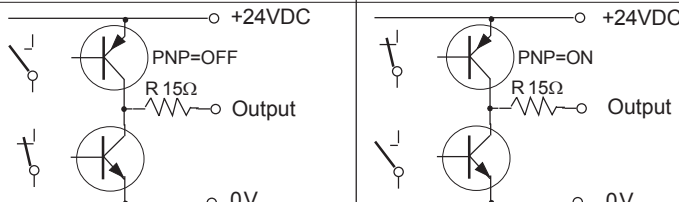
- With TEACH-IN function
- Types ISD: ATEX and IECEx certified
- Types ISD: For use in Ex Zones 1, 2, 21, 22, optical radiation can operate into Ex Zones 0 and 20
- Types ISN: For use in Ex Zones 2, 22
- Function largely independent from ambient contaminations



ATEX designation:

II 2(1)G & II 2(1)D

II 3G Ex nA op is IIB T4 Gc, II 3D Ex tc op is IIIA T135°C Dc IP67

Technical data		Type	ISD-2XC-IDX-OP	ISN-2XC-IDX-OP	RLR-2XC-IDX												
Type of Ex protection Gas, according to the ATEX directive 2014/34/EU			II 2(1)G Ex d [op is Ga] IIC T6 Gb	II 3G Ex nA op is IIB T4 Gc	NONE												
Type of Ex protection Dust, according to the ATEX directive 2014/34/EU			II 2(1)D Ex tb [op is Da] IIIB T100°C Db IP67	II 3D Ex tc op is IIIA T135°C Dc IP67	NONE												
For use in Ex Zones			Zones (0), 1, 2 and (20), 21, 22	Zones 2 and 22	NONE												
Range, nominal ^{Note 1}			2m, with Reflector D=83mm														
Potentiometer for fine adjust			yes														
Response time			7.5ms														
Minimum required time for TEACH-IN			200ms														
Power up delay time			500ms														
Light source			visible red, 623nm														
Optical aperture angel			appr. 12°														
Maximum optical radiant power			<=15mW	<=35mW	not limited												
Maximum optical radiant intensity			<=5mW/mm²	<=5mW/mm²	not limited												
Nominal supply voltage			24VDC +/-15%														
Absolute maximum supply voltage			Um = 30VDC														
Current consumption			50mA														
Power dissipation			1.68W														
Output, type			Push-Pull type output														
Output, maximum load			max. 100mA, short circuit protected														
Output impedance			appr. 15Ω														
Input, DI (Disable Input)			PNP compatible, Ri 10kΩ														
Input, TEACH-IN			PNP compatible, Ri 10kΩ														
Housing, brass Ms58, nickel plated			M30x150mm	M30x100mm													
Enclosure rating, according to EN 60529			IP 67	IP 54													
Working temperature range Tamb			-20°C < Tamb < +60°C	-10°C < Tamb < +60°C													
Storage temperature range			-20°C ... +70°C														
Relative humidity			15% ... 80%, noncondensing														
Vibration and shock resistance			Vibration: 30g over 20Hz to 2kHz. Shock: 100g for 3ms														
Pollution degree, according to EN 60664-1:2007			4														
Device designation, according to EN 60947-5-2			***-2XC-IDX(-OP): R3A30CP1, ***-2XC-IDX(-OP)-S099: R3A30CP2														
Connection cable			5+PE x 0,5mm², TPU, shielded, for trailing, halogen-free, oil resistant, length: 3m														
Connector, Types ISN/RLR-2XC-IDX(-OP)-S099			M12, Lumberg RSF 8, 8-pin, male														
Accessories included, all types			- 2 nuts M30 (or 1 clamp on request)														
Accessories, included, only types ISN/ISD-2XC-IDX-OP			- 1x Spare safety screw with packing ring for potentiometer sealing														
Accessories, included, only types ISN-2XC-IDX-OP-S099/S236			- 1x Safety lock device, mount at the cable connection, for locking the connection. (black synthetic device) - 1x Warning label "Do not disconnect.", self-sealing, for gluing on the cable connector, - 1x Dust protection cap														
Accessories, RLR/ISN-2XC-IDX(-OP)-S099/S236, not included			- Cordset wit female plug, Lumberg M12/8P, straight type: RKTS 8-184/xx, 8-299/..M or right angel type: RKWTH 8-184/xx, 8-299/..M														
Accessories, not included			- Reflector, type D=83mm or 50x100mm LHF - Reflector, 90° for M30, type "U-90"														
Options			- ISD-2XC-IDX-OP-S094: - ISD-2XC-IDX-OP-S047: - RLR/ISN-2XC-IDX(-OP)-S099: - RLR/ISN-2XC-IDX(-OP)-S107: - RLR/ISN/ISD-2XC-IDX(-OP)-S191: - ISN-2XC-IDX(-OP)-S236: Special gluing of the lenses Preliminary. Dust Ex: Ex tb [op is Da] IIC T100°C Db IP67 With male connector M12, Lumberg RSF 8, 8-pin Extended temperature range: -20°C up to +80°C TEACH-IN serves output II 3D Ex tc op is IIC T135°C Dc IP67/II 3G Ex nA op is IIC T4 Gc & connector M12, wiring layout same as ***-S099. specially for close range applications.														
Function Output and LED indication			 Light beam interrupted  Light beam free														
TEACH-IN: LED indication			<table><tr><th>LED</th><th>TEACH-IN</th><th>In normal operation</th></tr><tr><td>LED shows red</td><td>During activated TEACH-IN function: No valid reference data measured. Output not served Optional S191: Output = OFF.</td><td>Actual measured value is greater or less then the reference value, including the tolerance, determinately by the potentiometer. Output = OFF</td></tr><tr><td>LED shows green</td><td>During activated TEACH-IN function: Valid reference data measured and stored. Output not served Optional S191: Output = ON.</td><td>Actual measured value equal to the reference value, within the determinately tolerance. Output = ON.</td></tr><tr><td>LED shows yellow</td><td>--</td><td>No valid TEACH-IN done. Output remains switched OFF.</td></tr></table>			LED	TEACH-IN	In normal operation	LED shows red	During activated TEACH-IN function: No valid reference data measured. Output not served Optional S191: Output = OFF.	Actual measured value is greater or less then the reference value, including the tolerance, determinately by the potentiometer. Output = OFF	LED shows green	During activated TEACH-IN function: Valid reference data measured and stored. Output not served Optional S191: Output = ON.	Actual measured value equal to the reference value, within the determinately tolerance. Output = ON.	LED shows yellow	--	No valid TEACH-IN done. Output remains switched OFF.
LED	TEACH-IN	In normal operation															
LED shows red	During activated TEACH-IN function: No valid reference data measured. Output not served Optional S191: Output = OFF.	Actual measured value is greater or less then the reference value, including the tolerance, determinately by the potentiometer. Output = OFF															
LED shows green	During activated TEACH-IN function: Valid reference data measured and stored. Output not served Optional S191: Output = ON.	Actual measured value equal to the reference value, within the determinately tolerance. Output = ON.															
LED shows yellow	--	No valid TEACH-IN done. Output remains switched OFF.															
Output function in normal operation, LED indication:			<table><tr><th>LED = RED</th><th>LED = GREEN</th></tr><tr><td>  Wiring for "Teach-In" + 24VDC Supply voltage Teach-In Contact NO or PNP </td><td>  PNP=OFF PNP=ON Output Output </td></tr></table>			LED = RED	LED = GREEN	 Wiring for "Teach-In" + 24VDC Supply voltage Teach-In Contact NO or PNP	 PNP=OFF PNP=ON Output Output								
LED = RED	LED = GREEN																
 Wiring for "Teach-In" + 24VDC Supply voltage Teach-In Contact NO or PNP	 PNP=OFF PNP=ON Output Output																
***-2XC-IDX(-OP): Input DI (Disable-Input)			Sensor works >=15ms														
Uin: 24VDC, DI=+24V=Inactive			500us DI =24V														
Response time: <=500us			Sensor disabled														
Hold time: >=15ms, DI = 0V=Active			Output hold the last status														
Note 1: The nominal range is determined with a reflector diameter D=83mm.			500us DI =0V														
With reflectors type: 50x100mm LHF a significantly higher operating range can be achieved.			>=15ms														

ATEX/IECEx RELATED MARKINGS		CE 1258	Manufacturer with address
Type	ISD:	II 2(1)G Ex d [op is Ga] IIC T6 Gb, II 2(1)D Ex tb [op is Da] IIIB T100°C Db IP67	
Type	ISN:	II 3G Ex nA op is IIB T4 Gc, II 3D Ex tc op is IIIA T135°C Dc IP67	
Type	ISN-S236:	II 3G Ex nA op is IIC T4 Gc, II 3D Ex tc op is IIIB T135°C Dc IP67	
Type ISD:	EC-type examination certification	No. BVS 10 ATEX E130 X DEKRA	
Type ISD:	IECEx certification	No. IECEx 14.0108X	
Type ISN:	ATEX Declaration by manufacturer	According to the ATEX directive 2014/34/EU	
Tamb:	-20°C < Tamb < +60°C	Electrical dat according to the chart	
Date of production: Numerals 5 to 8 of the serial number		(year / calendar week)	

(X designation of the certification number: Fibre optics must only be used with sensors with certificated limited optical power)

Dimensions	ISN-2XC-IDX-OP-S236, same as ***-S099, with	150	1	+24VDC
Wiring	connector M12	32	2	Input TEACH-IN
ISN/ISD-2XC-IDX/IDI-OP		113	3	0V
ISN-2XC-IDX/IDI-OP-S236:	LED		4	Output
Potentiometer			5	Input DI
With dustproof packing screw			(6	NC, if present)
			green-yellow	PE

Dimensions	100	1	+24VDC
Wiring	30	2	Input TEACH-IN
RLR-2XC-IDX:	65	3	0V
		4	Output
		5	Input DI
		(6	NC, if present)
		green-yellow	PE

Dimensions, wiring	100	1/white	+24VDC
RLR/ISN-2XC-IDX(-OP)-S099:	13	2/brown	0V
ISN: Dust protection cap for the socket	30	3/green	Output
Connector M12 8-pin	65	4/yellow	Input TEACH-IN
LED		5/grey	Input DI
Potentiometer		6/pink	NC
ISN: With dustproof packing screw		7/blue	NC
		8/red	PE

Equipotential Bonding prescription for Ex Devices:	The end of the cable must be connected outside the hazardous location. Check the reliable, noncorrosive holding of the protection earth connection.		
	The cable shield is to connect to PE in a wide area.		

Operating Manual, EC-/EU-Declaration of Conformity:

LED red: Actual measure value is out of the permitted range. (The permissible tolerance range can be adjusted by the potentiometer).

Output = OFF. No valid TEACH-IN performed. Repeat the TEACH-IN procedure.

LED yellow: No valid TEACH-IN performed. Repeat the TEACH-IN procedure.

Disable-Input "DI": If several sensors are installed close to another, it is necessary to use sensors with disable input. By using the disable input DI, each sensor can be controlled in a short reaction time (Response time: 500us). If only one sensor is activated in the same time, a mutual influence is precluded.

DI = 0V or not connected = emitter enabled

DI = High (24VDC) = emitter disabled

For a correct function the sensor must be enabled for at minimum >= 15ms (DI=0V). If the DI input will be disabled, the outputs holds the previous output status from the last enabled time. The DI input is PNP compatible.

X-Function (Reversal function of the output)

By reversal connection of the supply voltage, the output function can be inverted. The LED doesn't change the function. (Wire 1= 0V / Wire 3 = +24VDC). Only types S191: The output function during TEACH-IN is not influenced.

Maintenance

Protect the sensor and the reflector against strong pollution. The adjustment of the Teach-In must be repeated at regular intervals, depending on use, after several days or at the latest approximative six months. If the reflector or the sensor lenses are contaminated, clean with alcohol. Do not use aggressive solvents. Reflectors can be destroyed by strong solvents. Equipment must only be repaired or serviced by the manufacturer.

General safety instructions

Types ISN-2XC-IDX-OP-S099/S236: "WARNING - EXPLOSION HAZARD - WHEN IN HAZARDOUS LOCATIONS, TURN OFF POWER BEFORE REPLACING OR WIRING MODULES. DO NOT DISCONNECT EQUIPMENT UNLESS POWER HAS BEEN SWITCHED OFF OR THE AREA IS KNOWN TO BE NONHAZARDOUS".

The mounting of the sensor in dusty locations without fixed cordset or protection cap results in a high ignition risk. The light barriers must not be used for Accident-Prevention! In worst case the output can change to any state! When installing and operating with the sensor, it is necessary to take into consideration the relevant international and other national regulations: EN 60079-14, ATEX 118a, single directive 1999/92/EC. In worst case the output can change to any state! When installing and operating with the sensor, it is necessary to take into consideration the relevant international and other national regulations: EN 60079-14, single directive 1999/92/EC.

The sensors are conform to the following standards:

IEC/EN 60079-0:2012+A11:2013, IEC/EN 60079-1:2007, EN 60079-15:2010, IEC/EN 60079-28:2007, IEC/EN 60079-31:2010, EN 60529:2014, EN 60950-1:2006, EN 61000-4-2 to EN 61000-4-6, EN 61000-6-1/-2, EN 61000-6-4, ATEX directive: 2014/34/EU, Machine directive: 2006/42/EC, EMC directive: 2014/30/EU, RoHS directive: 2011/65/EU.

General Notes, disposal

We reserve the right to modify our equipment. Our equipment is designed such way, that it has the least possible adverse effect on the environment. It neither emit or contain any damaging or siliconized substances and use a minimum of energy and resources. No longer usable or irreparable units must be disposed of in accordance with local waste disposal regulations.

EC-/EU-Declaration of conformity:

IECEx certification, types ISD: Ex d [op is Ga] IIC T6 Gb, Ex tb [op is Da] IIIB T100°C Db IP67. Certification No. IECEx BVS 14.0108X.

ATEX certification, types ISD: II 2(1)G Ex d [op is Ga] IIC T6 Gb, II 2(1)D Ex tb [op is Da] IIIB T100°C Db IP67. Certification No. BVS 10 ATEX E 130 X, DEKRA EXAM GmbH, Zertifizierungsstelle, Carl-Beyling-Haus, Dinendahlstrasse 9, D-44809 Bochum, ident number: 0158.

ATEX certification, types ISN: II 3G Ex nA op is IIB T4 Gc, II 3D Ex tc op is IIIA T135°C Dc IP67. ATEX declaration by manufacturer in accordance to the ATEX directive 2014/34/EU.

ATEX certification of quality type production of Ex devices in accordance to the directive 2014/34/EU, CE 1258, Eurofins. Certification No: SEV 21 ATEX 4580, QAR No. CH/SEV/ QAR21.0009/00. The conformity of the devices with the EC standards and directives and the EC-type examination certificate and the observation of the Quality Safety System ISO 9001:2015 with the ATEX module "Production", declares:

Normal operation:

If the sensor not recognize the difference between the reference value to the actual measure value turn the potentiometer to the left side or optimize the measure setup.

LED green: Actual measure value equal to the reference value with adjusted tolerance

Output = ON.

TEACH-IN function

Because the sensor compares a memorized reference value with a actual measure value, first a reference value must be memorized. The reference value will be picked-up by the TEACH-IN function and memorized in an EEPROM. (Data holding >= 5 years). TEACH-IN is activated by a +24VDC pulse. With the potentiometer, the tolerance range for the permitted deviation can be adjusted. (Left turn = small tolerance; right turn = great tolerance). The potentiometer has no influence to the range of the sensor.

TEACH-IN procedure

Turn the potentiometer to the right side (great tolerance). Adjust the sensor to the reflector. The light beam between sensor and reflector must be free.

Activate TEACH-IN. During activated TEACH-IN the LED must show green. If the LED shows red, no valid value is measured. The output will be not served. For the devices RLR/ISN/ISD-2XC-IDX-S191: The output is switched ON, if a valid value is measured. If no correct TEACH-IN is possible, the output is switched OFF.

LED red: No valid reference value picked-up. Sensor or reflector strong polluted, light barrier bad aligned or distance between sensor and reflector to short or to long. Only S191: The output is switched OFF.

LED green: Valid measure value picked-up and memorized. Only S191: The output will be switched to +24VDC during TEACH-IN.

LED yellow: If the LED shows yellow after the TEACH-IN procedure, the procedure is not correctly closed. Optimize the measurement setup and repeat the TEACH-IN procedure.

Normal operation:

If the sensor not recognize the difference between the reference value to the actual measure value turn the potentiometer to the left side or optimize the measure setup.

LED green: Actual measure value equal to the reference value with adjusted tolerance

Output = ON.

LED red: No valid reference value picked-up. Sensor or reflector strong polluted, light barrier bad aligned or distance between sensor and reflector to short or to long. Only S191: The output is switched OFF.

LED green: Valid measure value picked-up and memorized. Only S191: The output will be switched to +24VDC during TEACH-IN.

LED yellow: If the LED shows yellow after the TEACH-IN procedure, the procedure is not correctly closed. Optimize the measurement setup and repeat the TEACH-IN procedure.

Normal operation:

If the sensor not recognize the difference between the reference value to the actual measure value turn the potentiometer to the left side or optimize the measure setup.

LED green: Actual measure value equal to the reference value with adjusted tolerance

Output = ON.

LED red: No valid reference value picked-up. Sensor or reflector strong polluted, light barrier bad aligned or distance between sensor and reflector to short or to long. Only S191: The output is switched OFF.

LED green: Valid measure value picked-up and memorized. Only S191: The output will be switched to +24VDC during TEACH-IN.

LED yellow: If the LED shows yellow after the TEACH-IN procedure, the procedure is not correctly closed. Optimize the measurement setup and repeat the TEACH-IN procedure.

Normal operation:

If the sensor not recognize the difference between the reference value to the actual measure value turn the potentiometer to the left side or optimize the measure setup.

LED green: Actual measure value equal to the reference value with adjusted tolerance

Output = ON.

ISD-2XC-IDX-OP-IECEx_e12/2022-06-14/MP

Tippkemper - Matrix GmbH
Meegeren Str. 43 D-51491 Overath
Tel.: +49 2206 9566-0 Fax -19
info@tippkemper-matrix.com

Matrix Elektronik AG (Manufacturer)
Kirchweg 24 CH-5420 Ehrendingen
Tel.: +41 56 20400-20 Fax -29
info@matrix-elektronik.com